



Oil Mist Collectors

ProVent MachineMaster Oil Mist Collectors are an industry standard for the safe and effective removal of airborne process oil and coolant from industrial machining operations. They use multi-stage, mechanical filtration making them reliable, efficient, and easy to maintain.

MachineMaster Oil Mist Collectors are an affordable solution to common machining oil mist problems and can be fitted to existing operations easily.

Standard Features

- **Integral High Efficiency Fan Assemblies**
 - AMCA Rated, Integral Direct Drive Fan Assemblies with Keyless Concentric Bushings.
- **Multi-Stage Filter Cleaning**
 - Exceptional strength-to-weight ratio. Non-conductive and slip resistant.
- **12 Gauge Steel Construction**
 - Solid welded heavy steel for superior strength and longevity.
- **Convenient Module Door Access**
 - Filter change-outs are simple with large doors for filter access.
- **ASHRAE Rated Filter Flows**
 - Provides 99.5% efficiency down to .5 micron.
- **Urethane Mastic Coating**
 - Durethane DTM by PPG chemically resistant and extremely durable. Provides excellent corrosion resistance and has superior color and gloss retention.
- **Magnahelic Gauge**
 - Provides pressure reading for ease in determining needed filter replacement and maintenance.

FILTER CELLS

STAGE 1

Aluminum chevron type mist eliminator 24" x 24" x 4", prevents swarf, shavings, large particles and large fluid droplets from entering filters.

STAGE 2

Aluminum mesh pre-filter 24" x 24" x 1", traps larger oil or water mist particles, which drain down into plenum.

STAGE 3

10 pocket, lofted fiberglass V-bag filter, 95% (ASHRAE 52-76) 24" x 24" x 36", provides final air filtration prior to exhausting back into ambient air. 126 sq. ft. of area per filter.

Popular Options




Carbon filter cell is used in cases where odors, gases, and vapors are associated with a process. Filter trays are removable and refillable. Activated carbon may be replaced with potassium permanganate. Available on models 1500 CFM and above.

All ProVent equipment is available in painted or unpainted stainless steel. Popular with the food processing industry, stainless steel provides cleanliness and longevity to the equipment.



ProVent Silencers reduce the noise level produced by the exhausted air.

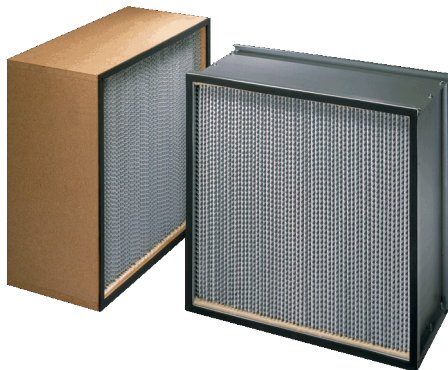

Optional HEPA cell can be added where increased filtration is needed.

E. staff@proventilation.com
Manufactured in Harbor Springs, Michigan

P. 800-610-6010

Total Air/Energy
SOLUTIONS
Technology • Efficiency • Performance



Sales@TotalAirEnergy.com
www.TotalAirEnergy.com
Phone 206.454.7070
Fax 206.892.9644
727 S. Kenyon St., Seattle, WA 98108

Specifications

Model	MM-400	MM-600	MM-800	MM-1000	MM-1500	MM-2000	MM-4000	MM-6000	MM-8000	MM-12,000
Air Volume, CFM	400	600	800	1,000	1,500	2,000	4,000	6,000	8,000	12,000
Static Pressure, Total wg	6"	6"	6"	7"	7"	9"	9"	8"	8"	8"
Static Pressure, External wg	3"	3"	3"	4"	4"	6"	6"	5"	5"	5"
Motor, HP	1	1.5	1.5	2	3	5	10	15	15	25
Motor RPM	3450								1750	
Voltage	460V / 3Ph / 60Hz									
Full Load Amps	1.8	2.6	2.6	3.4	4.8	7.6	14	21	21	34
Stage 1 Impinger QTY	1					2		3	4	5
Stage 1 Impinger	24" x 24" x 4" Aluminum Washable									
Stage 2 Mesh QTY	1					2		3	4	5
Stage 2 Mesh	24" x 12" x 1" Galvanized Washable									
Stage 3 Final Filter QTY	1					2		3	4	5
Stage 3 Media Size	24" x 24" x 12"					24" x 24" x 36"				