



Intermittent Duty Vacuum

THE RED LINE WS2320-220

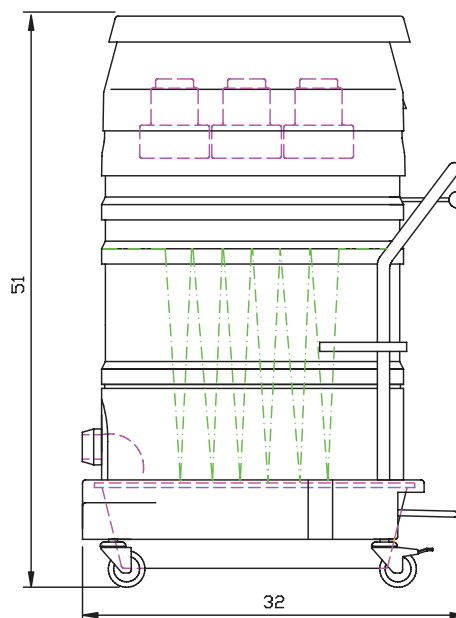

THE RED LINE SERIES

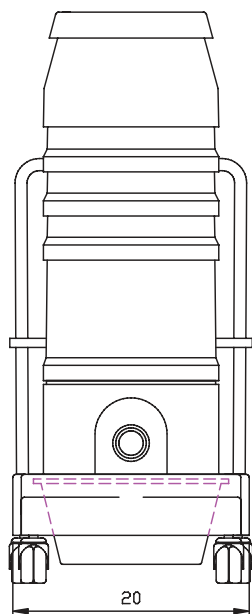

WS2320-220 Standard Specifications

- Three 4 HP, 1200 Watt Motors
- 220 Volt, Single Phase, 60 Hz
- 28 ft² MicroClean Filter with Manual Shaker System
- 2.75" Inlet Connection with Aluminum Cast Deflector
- Standard "Acustek" Motors
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base with 3" Heavy Duty Double Casters
- Compression Cast Composite Modular Housing



Base Price¹: WS2320-220 - Call for pricing

ADDER	DESCRIPTION
BR	40 ft ² HEPA Filter with Minihelic ¹
35230R	Active Charcoal Filter Assembly, 20 lbs. of media ²
9852R	Motorized Filter Shaker with Switch, 110 Volt ²
18630R	Reverse Pulse with Electronics & Pressure Gauge ²
25143	Minihelic for Filter Monitoring ²
1302120	Extended Caster Assembly with Two 6" Swivel & Two 6" Rigid Casters with Brakes ²

¹ - RL, ² - ADD

Ruwac USA • 54 Winter Street • Holyoke, MA 01040

Total Air/Energy SOLUTIONS
Technology • Efficiency • Performance



Sales@TotalAirEnergy.com
www.TotalAirEnergy.com
Phone 206.454.7070
Fax 206.892.9644
727 S. Kenyon St., Seattle, WA 98108