



**DuraBench VB series** stationary work stations are highly configurable and provide exceptional performance when connected to ProVent and other dust collection systems.

## Applications


- Sanding Processes
- Polishing
- Deburring
- Cutting
- Grinding
- Other hand-held shop processes

## Features

- Durable Fiberglass Work Surfaces
- Single or Multiple Discharge Duct Connection Ports
- Structural Legs with Leveling Screws
- Heavy Gauge Sheet Steel Construction
- Tapered Table Bottoms
- Uniform Surface Velocities with Uniquely Designed Internal Baffle Assembly
- 3 Foot to 12 Foot Table Widths Standard

## Options

- Aluminum Partitioned Work Stations
- Electrical Service Plugs
- Clean-Out Door
- Work Bench Hoods and Lighting
- Work Deck Materials
- Service Shelf
- Custom Work Benches
- Lexan face shield

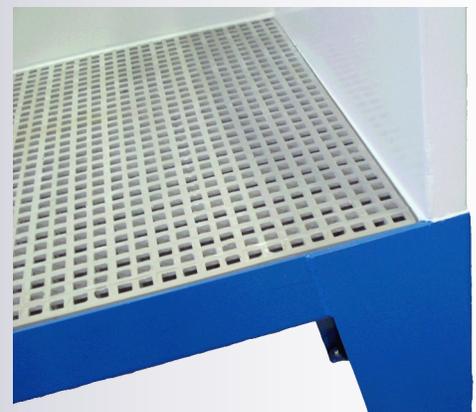

## Sizes and Configurations

VB Series Work Stations come in a variety of sizes and configurations to meet your specific needs. Standard deck sizes range from 3 feet to 12 feet or custom deck sizes to meet your application can be accommodated. Dividing panels can be added to allow multiple tasks to be completed on a single bench.

Lighting and protective Lexan face shields are available to provide a safe and comfortable work environment.

Deck Size	CFM Requirement Based on 300FPM at the Deck
24" x 36"	1440
24" x 48"	1920
24" x 60"	2400
24" x 72"	2880
24" x 84"	3360
24" x 96"	3840
24" x 108"	4320
24" x 120"	4800
24" x 132"	5280
24" x 144"	5760
36" x 36"	2160
36" x 48"	2880
36" x 60"	3600
36" x 72"	4320
36" x 84"	5040
36" x 96"	5760
36" x 108"	6480
36" x 120"	7200
36" x 132"	7920
36" x 144"	8640



Deck removed to show internal deflection plate that creates even flow across the bench